

Galaxy H205 TN Smartflex



H 205

P 88

L 94 • 125 • 188

meat • sandwiches • drinks • dairy • fresh products

Automatic opening glass door multideck chiller, with Smartflex door system for contactless shopping. Fitted with an environmentally friendly plug-in R290 refrigeration system for the display of dairy products, meat, fresh and pre-packed products

Installation

Plug-in

Cabinet Front Height

430 mm

Configuration

Smartflex Automatic Door Multideck

Refrigerant

R290

Refrigeration System

Ventilated (RV)

Compressor

Hermetic

Defrost

Off cycle

Temperature Range

- 1 / + 5 °C

Climate Class

3M1

Operating Conditions

25°C Ambient / 60% RH

Power Supply

230V / 1 Ph / 50Hz

Electrical Amperage 94

10A

Electrical Amperage 125

10A

Electrical Amperage 188

20A

Closing System

Smartflex Auto-Opening

Side Panels

- Panoramic End Panel - safety glass (Std)
- Solid Mirror End Panel (Optional)

Shelves No.

5 with LED (Lighting Standard)

Shelves Type

Solid

Shelves Fence

Solid

Lighting

- 4000K LED Canopy (Std)
- 4000K Undershelf LED Shelf (Std)
- 3000K LED Colour (Optional)

Inside Colour

RAL 9005 - Jet Black (Std)

Outside Colour

RAL 9005 - Jet Black (Std)

Side Panels Colour

RAL 9005 - Jet Black (Std)

Base/ Equipment Handling

- Castors with brake (Std)
- 4 adjustable feet (optional)



Multideck Display with Smartflex Automatic Opening Doors

Inside Colour



Outside Colour



Side Panels Colour





RAL colour system or stainless steel options available ex. factory *POA



Galaxy H205 TN Smartflex

		94	125	188
External Dimensions PANORAMIC (LxDxH)	<i>Adjustable Feet</i>	993 x 875 x 2054 mm	1300 x 875 x 2054 mm	1935 x 875 x 2054 mm
	<i>Swivel Castors</i>	993 x 875 x 2123 mm	1300 x 875 x 2123 mm	1935 x 875 x 2123 mm
External Dimensions SOLID (LxDxH)	<i>Adjustable Feet</i>	1011 x 875 x 2054 mm	1318 x 875 x 2054 mm	1953 x 875 x 2054 mm
	<i>Swivel Castors</i>	1011 x 875 x 2123 mm	1318 x 875 x 2123 mm	1953 x 875 x 2123 mm
Capacity (gross/net)		596/355 lt	754/453 lt	1129/665 lt
Net Weight		285 kg	345 kg	485 kg
Refrigeration		Ventilated		
Refrigerant		R290 / GWP3		
Climate Class		3M1		
Operating Conditions		25 °C / 60 %RH		
Temperature Range		-1 / +5 °C		
Compressor		1 Hermetic		2 Hermetic
Defrost		Off Cycle		
Power Supply		230 V / 1 ph		
Power Amp at Plug <i>20A Plug supplied - 56 Series</i>		10	10	20
Lighting - Canopy		LED 4000K		
Number of Shelves		5	5	5
Dimensions - Shelf Line 1		350 x 94 mm	350 x 125 mm	350 x 188 mm (2 Shelves)
Dimensions - Shelf Line 2 to 4		350 x 94 mm	350 x 125 mm	350 x 188 mm (2 Shelves)
Dimensions Base		382 x 94 mm	382 x 125 mm	382 x 188 mm (2 Shelves)
Shelf Bracket Adjustment		0°, 10°, 20°		
Shelf Lighting - Undershef		LED 4000K		
Shelf Merchandising		H30 Plexiglass Product Stop Price Holder with Ticket Strip		
Closing System		Smartflex Auto-Opening - Single Glass Wings		
Swivel Castors with Brakes Standard <i>Leveling Feet Optional</i>		STD	STD	STD
Exterior Colour <i>Ex Works RAL options available</i>		RAL 9005 JET BLACK - Standard		
Interior Colour <i>Ex Works RAL options available</i>		RAL 9005 JET BLACK - Standard		
End Panel		Panoramic (25mm)	Solid (34mm)	Solid with Mirror (34mm)
Standard Configuration		REFRIGERANT - R290 LIGHTING - Canopy & Under Shelf 4000K END PANELS - Panoramic CLOSING SYSTEM - Smartflex Auto BASE - Swivel Castors		

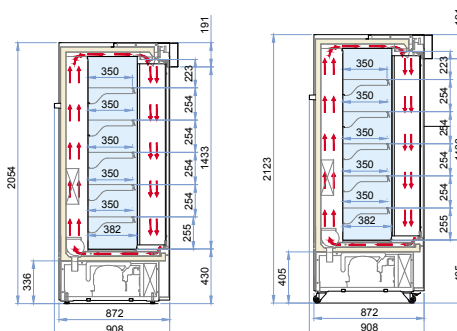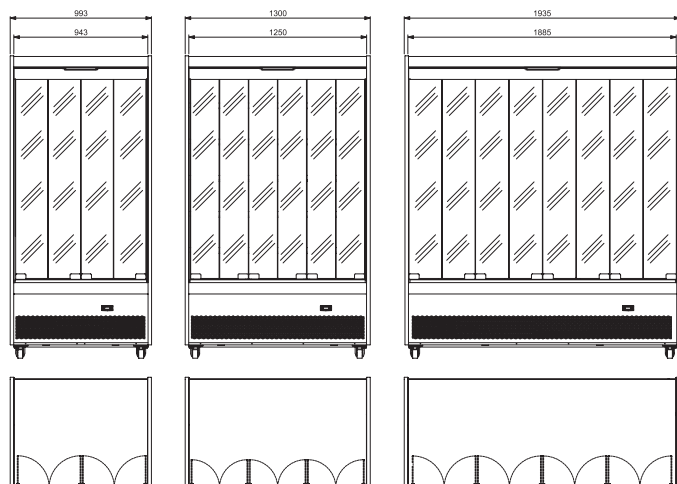

McAlpine Hussmann

2-6 Niall Burgess Road, Mt Wellington, Auckland 1060, New Zealand

ph. 0800 473 374

e. commercialnz@hussmann.com

w. www.mcalpinehussmann.co.nz



A Panasonic Company