

Galaxy H205 TB Glass Door Freezer



H 205

P 84

L 1P • 2P • 3P

frozen food • ice cream

Glass Door Freezer with triple glazed doors and fitted with an environmentally friendly plug-in R290 refrigeration system for the display of frozen foods and ice cream.

Installation

Plug-in

Cabinet Front Height

430 mm

Configuration

Glass Door Freezer

Refrigerant

R290

Refrigeration System

Ventilated (RV)

Compressor

Hermetic

Defrost

Hot Gas

Temperature Range

- 23 / -25 °C

Climate Class

3L1

Operating Conditions

25°C Ambient / 60% RH

Power Supply

230V / 1 Ph / 50Hz

Electrical Amperage 1P

10A

Electrical Amperage 2P

15A

Electrical Amperage 3P

20A

Closing System

Hinged Glass Doors -
Triple Glass

Side Panels

Solid End Panel (Std)

Shelves No.

5 x Grid Shelves (Std)

Shelves type

Wire Grid

Shelf Fence

Standard with Wire Grid

Lighting

5700K LED lighting on Mullion
and end panels (Std)

Inside Colour

RAL 9005 - Jet Black (Std)

Outside Colour

RAL 9005 - Jet Black (Std)

Side Panels Colour

RAL 9005 - Jet Black (Std)

Base/ Equipment Handling

- Castors with brake (Std)
- 4 adjustable feet (optional)



Glass Door Freezers

Inside Colour

 RAL optional

Outside Colour

 RAL optional

Side Panels Colour


 RAL optional

RAL colour system option available ex. factory *POA



Galaxy H205 TB Glass Door Freezer

		1P	2P	3P
External Dimensions SOLID (LxDxH)	<i>Adjustable Feet</i>	668 x 859 x 2048 mm	1340 x 859 x 2048 mm	2008 x 859 x 2048 mm
	<i>Swivel Castors</i>	668 x 859 x 2141 mm	1340 x 859 x 2141 mm	2008 x 859 x 2141 mm
Capacity (gross/net)		526/350 lt	1166/790 lt	1807/1200 lt
Net Weight		170 kg	310 kg	490kg
Refrigeration		Ventilated		
Refrigerant		R290 / GWP3		
Climate Class		3L1		
Operating Conditions		25 °C / 60 %RH		
Temperature Range		-23 / -25 °C		
Compressor		1 Hermetic	2 Hermetic	3 Hermetic
Defrost		HOT GAS		
Power Supply		230 V / 1 ph / 50 Hz		
Power Amp at Plug <i>20A Plug supplied - 56 Series</i>		10A	15A	20A
Number of Shelves		5	5	5
Shelf Dimensions		484 x 600 mm (1 Shelves)	484 x 1200 mm (2 Shelves)	484 x 1800 mm (3 Shelves)
Base Dimensions		463 x 600 mm (1 Shelves)	463 x 1200 mm (2 Shelves)	463 x 1800 mm (3 Shelves)
Shelf Bracket Adjustment		0°, 10°, 20°		
Internal Lighting		LED 5700K		
Shelf Merchandising		Wire Grid		
Closing System		Triple Glazed Glass Doors - Hinged		
Swivel Castors with Brakes Standard <i>Leveling Feet Optional</i>		STD	STD	STD
Exterior Colour <i>Ex Works RAL options available</i>		RAL 9005 JET BLACK - Standard		
Interior Colour <i>Ex Works RAL options available</i>		RAL 9005 JET BLACK - Standard		
End Panel		Panoramic (25mm)	Solid (34mm)	Solid with Mirror (34mm)
Standard Configuration		REFRIGERANT - R290 LIGHTING - Canopy & Internal 5700K END PANELS - Panoramic CLOSING SYSTEM - Triple Glazed Glass Doors - Hinged BASE - Swivel Castors		

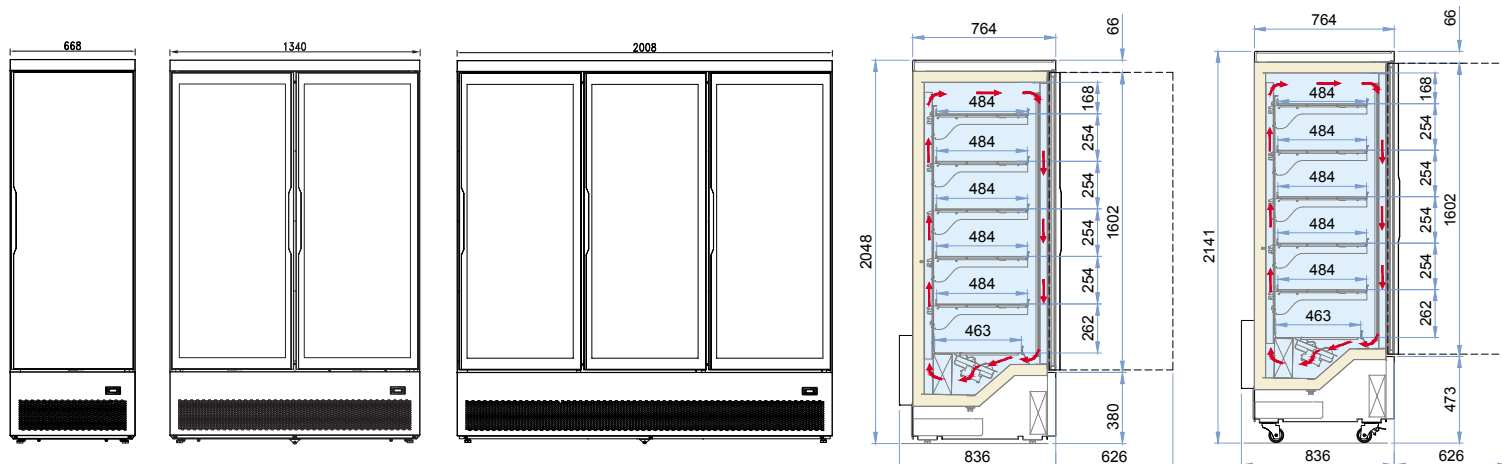

McAlpine Hussmann

2-6 Niall Burgess Road, Mt Wellington, Auckland 1060, New Zealand

ph. 0800 473 374

e. commercialnz@hussmann.com

w. www.mcalpinehussmann.co.nz

MCALPINE HUSSMANN
A Panasonic Company